


ONDATEX™

NEEDLED CORRUGATING BELTS

CHARACTERISTICS

Material	Needled polyester belt
Weight	4800 gsm
Thickness	9,0 mm
Breaking Point	32,000 Kg/mt
Permeability	12 CFM
Seam	Covered ONDASEAM™ single flap

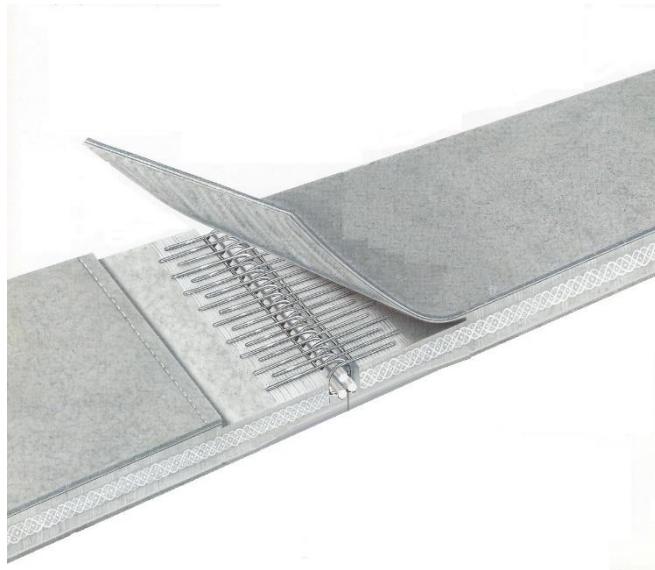

APPLICATIONS

Needled 100% synthetic belts for machines with rollers pressure system. All the belts of the series ONDATEX™ are treated with the exclusive treatment THERMICSTAT™, which improves the efficiency of drying, reduces the formation of static electricity, and increases the capacity of board tracking.

If there should be a particular wearing of the edges, the belt can be treated with the special treatment RE-30™ which allows to keep a regular pressing of the board even in case of frequent changes in board deckle.