


# CONVEYOR VPV

## CHARACTERISTICS

Weight	1000 gsm
Thickness	1,8 mm
Breaking Point	10.000 Kg/ml
Permeability	80 CFM

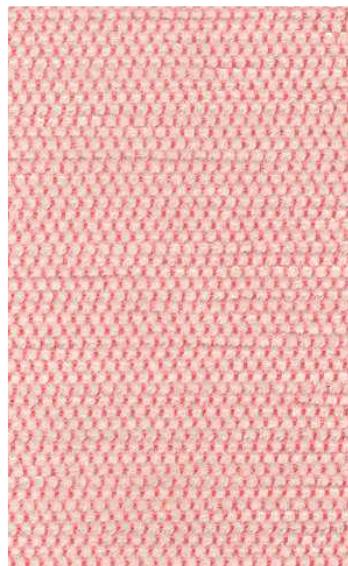

## APPLICATIONS

Special conveyor belt with a triple-layer base fabric manufactured with multifilament polyester yarns in the longitudinal direction; monofilament polyester yarns transverse in the two lower layers and with polyester "spun" yarn transverse to the right, giving the belt a velvety, abrasion-resistant surface with soft contact with the cardboard .