


CONVEYOR OTM

TRANSPORT FELTS AND BELTS

CHARACTERISTICS

| | |
|--------------|---------------------------------------|
| Weight | 3850 gsm |
| Thickness | 7,00 mm |
| Break Point | 36.500 KG/mt |
| Seam | ONDASEAM with flap / metallic clipper |
| Permeability | 14 cfm |

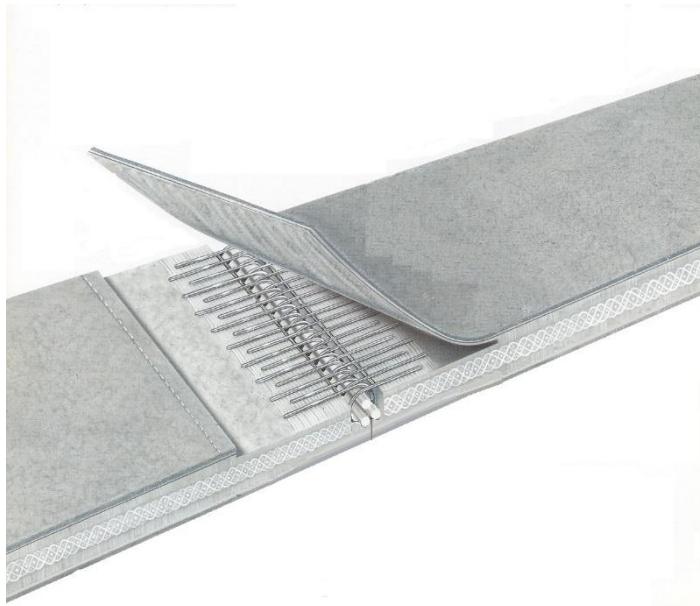

APPLICATIONS

It is a needled 100% synthetic belt, with a double layer base cloth in special high resistance threads for the board transport.

After needling, the belt undergoes a resin treatment and heatsetting for an increased stability, better compactness, thickness evenness and abrasion resistance.

According to the specific necessity it is available with standard clipper seam or covered seam.